



BAUCE
1970

MVC-4S VERSUS

WE INTRODUCE A NEW WORLD OF SETTING OUT

MVC-4S VERSUS



Cilindro a lame
Blade cylinder

IT La nuova messa a vento in continuo è stata realizzata grazie ad un'esperienza di oltre 45 anni nel settore messa a vento in continuo e sprematrici. Questa macchina consente di ottenere un prodotto qualitativamente superiore a quello derivante dall'utilizzo dei sistemi tradizionali. Le numerose prove comparative effettuate hanno dimostrato la superiorità della MVC-4 relativamente all'incremento della superficie e alla qualità di asciugatura.

Le innovazioni tecniche sono le seguenti:



NUOVO DESIGN

Caratterizzato da un gruppo di cilindri a lame con diametro più grande per una maggiore apertura



MOTORI PIÙ POTENTI

I due motori dei cilindri a lame sono più potenti



3 PASSAGGI

Possibilità di effettuare tre passaggi della pelle sotto i cilindri a lame



EN The new through-feed setting out and sammying machine is the result of over 45 years of experience in the through-feed leather pressing and spreading sector. The quality of its output is higher than the traditional system one. Many comparative tests have proved the superiority of the MVC-4 model in terms of surface increase and drying quality.

The machine features the following technical innovations:



NEW DESIGN

Including a cylinders assembly with larger blade diameter and more blade to have a better stretching of the leather



MORE POWERFUL MOTORS

The two motors of blade cylinders are more powerful



3 PASSAGES

Option of three leather passes through the bladed cylinders



MVC-45 VERSUS



IT **MACCHINA PER METTERE AL VENTO E SPREMERE IN CONTINUO
CON 4 DIVERSE MODALITÀ:**


Fianco- fianco | culatto-testa
Fianco- fianco pelli con gobba | pelli mezzine

EN **TROUGH FEED SETTING OUT AND SAMMYING MACHINE
WITH 4 DIFFERENT WORKING FUNCTIONS:**

Belly to belly mode | back to neck mode
Belly to belly mode for leather with hump | side leather




MVC-4S VERSUS

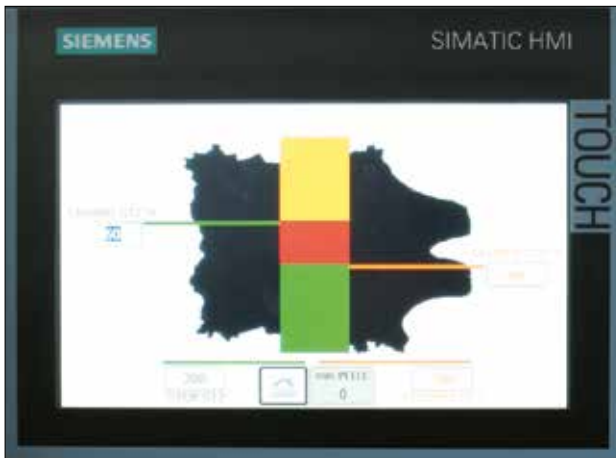


Nuovo Touchscreen PLC
New Touchscreen PLC



Regolazione cilindri a lame
Blade cylinders setting

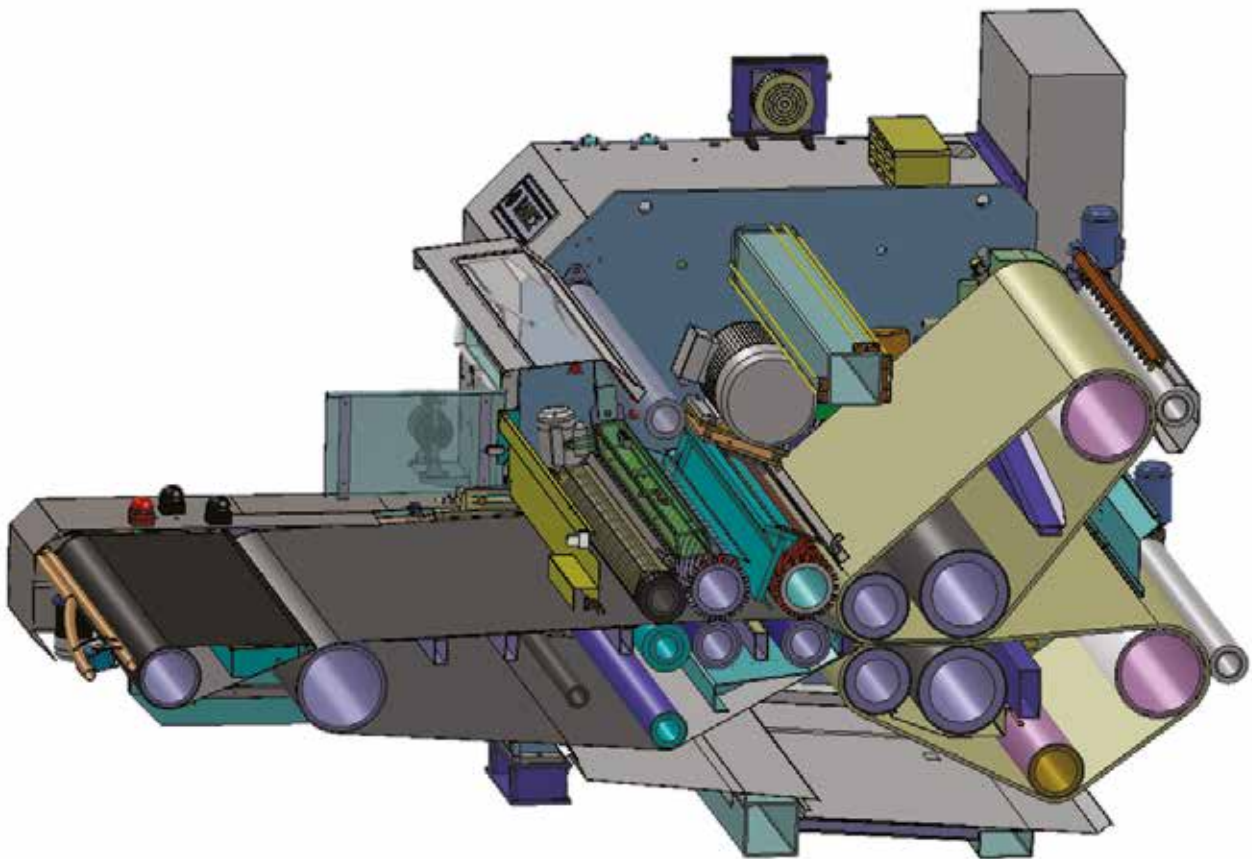

BAUCE
1970

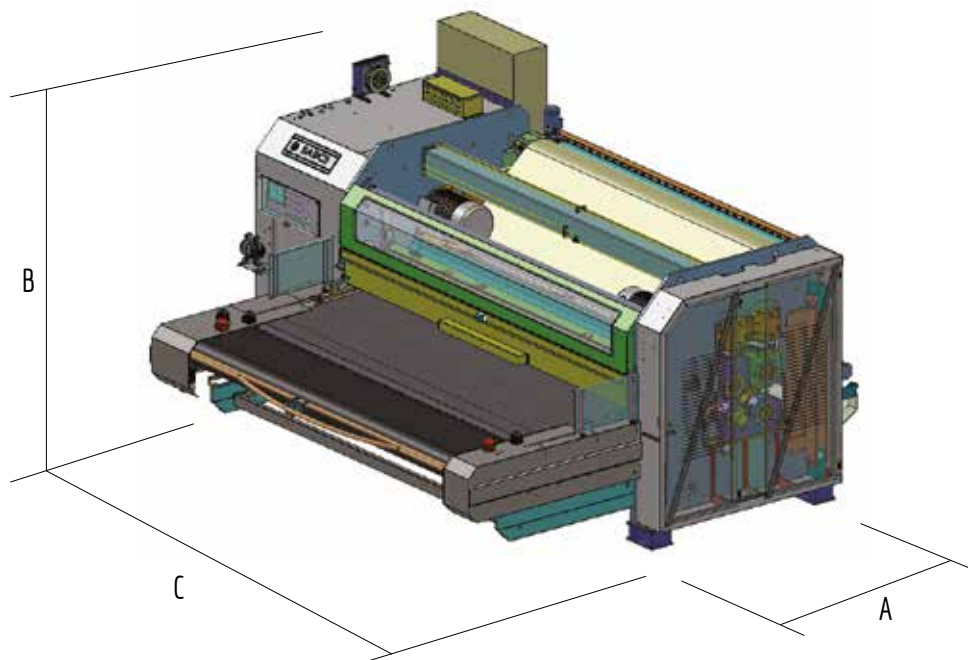

MVC-4S VERSUS

DATI TECNICI / TECHNICAL DATA

TAVOLA / WORKING WIDTH		2500	3100	3300	3500
VELOCITÀ / SPEED	m/min	5/17	5/17	5/17	5/17
POTENZA / INSTALLED POWER	kW	59	59	59	59
PRESSIONE / PRESSURE	bar	65 ÷ 75	65 ÷ 75	65 ÷ 75	65 ÷ 75
OLIO / OIL	Kg	60	60	60	60
AL. PNEUMATICA / AIR CONNECTION	bar	6	6	6	6
CONSUMO ARIA / AIR CONSUPTION	Lt/m	0,1	0,1	0,1	0,1
AL. ACQUA / WATER CONNECTION	bar	2	2	2	2
CONSUMO ACQUA / WATER CONSUPTION	Lt/m	81	86	88	90
LARGHEZZA LAVORO / WORKING WIDTH	mm	2500	3100	3300	3500
PROFONDITÀ / DEEPHT [A]	mm	4360	4360	4360	4360
ALTEZZA / HEIGHT [B]	mm	2480	2480	2480	2480
LARGHEZZA / LENGTH [C]	mm	4420	5020	5220	5420
PESO NETTO TOT. / TOTAL NET WEIGHT	Kg	12500	15500	17000	17500
PESO TOT. IMBALLO / TOTAL WEIGHT	Kg	12600	15600	17100	17600
VOLUME IMBALLO / VOLUME	m ³	24	26	27	28

BAUCE TRI.MA SRL



Head office:

Via del lavoro 27, 36070 Trissino VI ITALY



Tel. +39 0445 490740

Fax +39 0445 490068



info-line@bauce.com

www.bauce.com

Operating Unit:

Via Arzignano 33, 36070 Trissino VI ITALY

R&D Department:

Via dell'artigianato 20, 36070 Trissino VI ITALY

Bauce do Brasil

Endereço: Av. Bom Jardim, 1777, Ivoti - RS BRASIL

Tel.: +555135560555

